



Gateway International 360, LLC

GATEWAY 360, BORN FOR GREEN ENERGY SOLUTIONS

✉ tstevens@gatewayintl360.com

🌐 www.gatewayintl360.com

📍 P. O. Box 518, Bear, DE 19701

GW-EV250

Level 2

Up to 48A



3
warranty

READY TO HANDLE THE MOST POWERFUL EV BATTERIES



POWERFUL

Up to 48 A / 11.5k W of
charging capacity.



COMPATIBLE

SAE J1772 compliant,
type 1 plug with 18ft
cable.



CONVENIENT

Adjust power as
needed, 48A-16A.



CONNECTED

Complete with LAN connec-
tivity (Wi-Fi or 4G optional),
ensuring chargers are
always online.



OCPP

OCPP 1.6J help you
connect EV charger
to the cloud.



DURABILITY

IP65 and IK 08 protection
ratings, allowing for
indoors or outdoors.



Black



Silver

DATA SHEET

Model No.	GW-EV250-1-3.8	GW-EV250-1-7.6	GW-EV250-1-9.6	GW-EV250-1-11.5
Input Voltage	208-240 Vac	208-240 Vac	208-240 Vac	208-240 Vac
Frequency	60Hz	60Hz	60Hz	60Hz
Amperage	16A	32A	40A	48A
Max. Power Output	3.8kW	7.6kW	9.6kW	11.5kW
Product Dimensions	7.1" x 7.1" x 3.7"			


Protection & Standard

Charging Interface	SAE J1772 Compliant, Type 1 Plug
Safety Compliance	UL2594, UL2231-1 and UL2232-2
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection

Environmental

Operating Temp.	-22°F to 122°F
Relative Humidity	Up to 95% non-condensing
Cable Length	18f t Standard (25ft Optional with Surcharge)

OCPP 1.6J, CONNECTED SUCCESSFULLY WITH GATEWAY/ZEVTRON EVC PLATFORMS

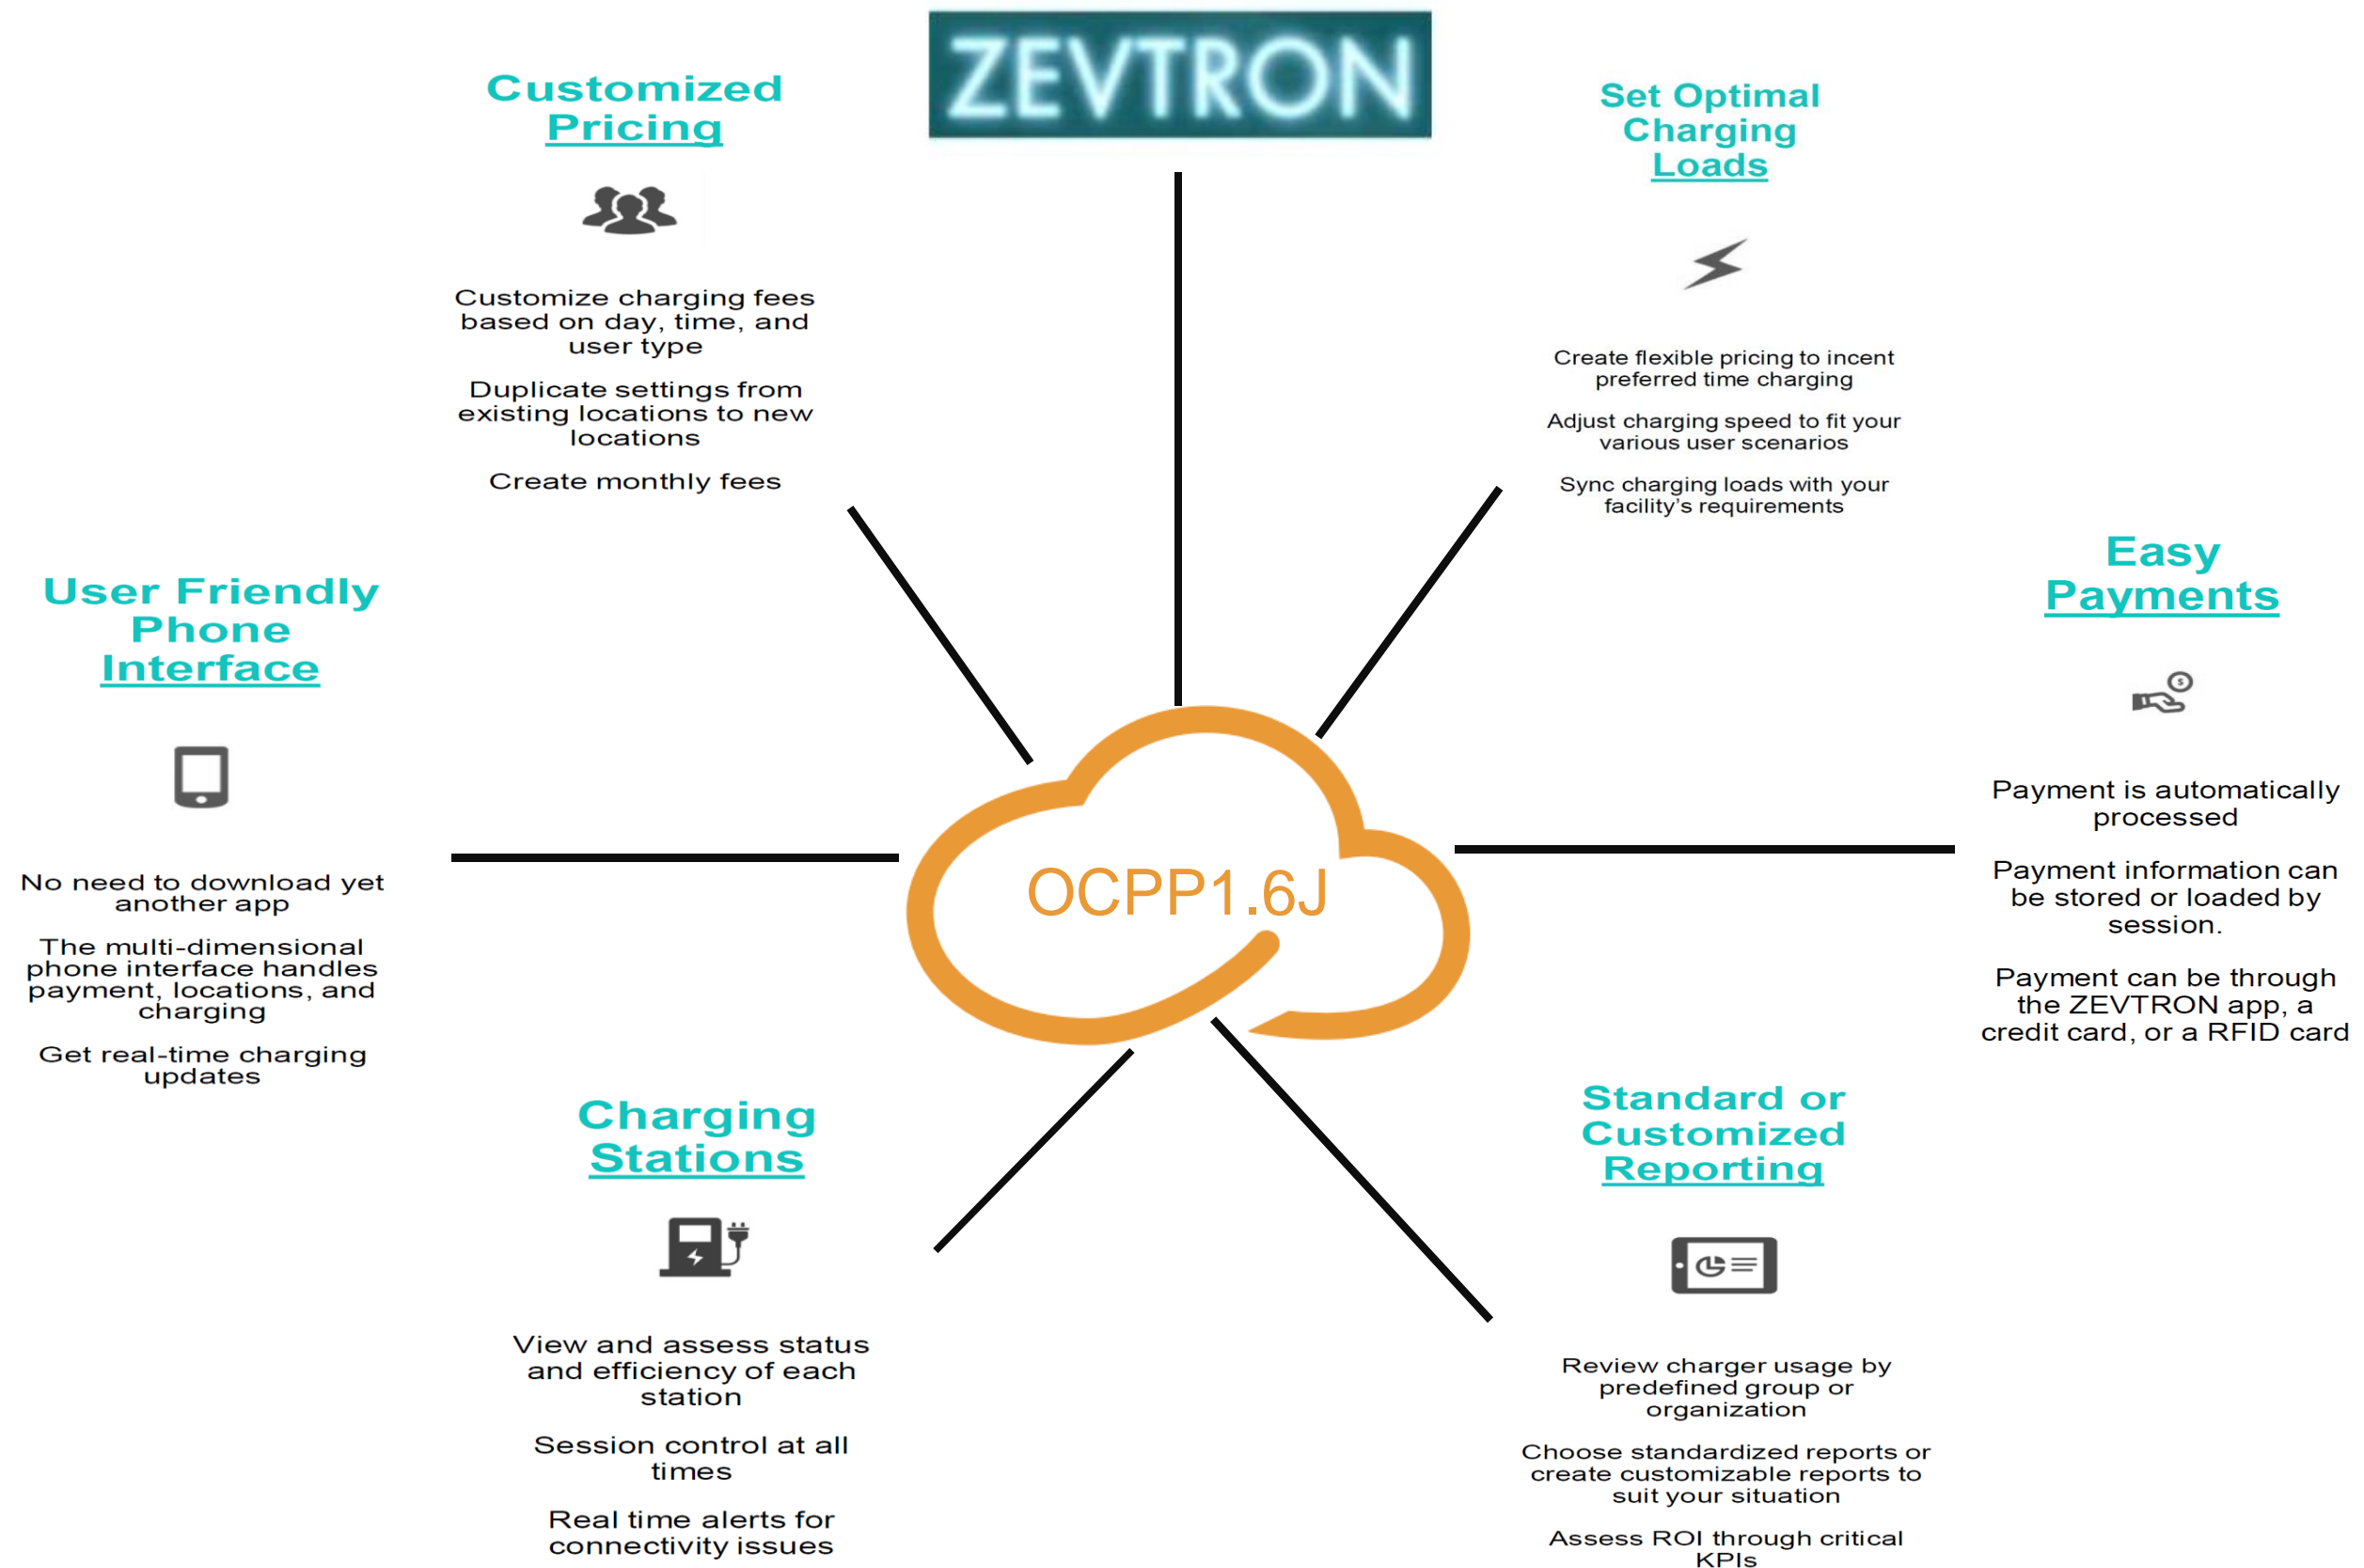

EASY INSTALLATION



Step 1

- > Drill 4 Screw Holes with a diameter of 8 mm and a depth of 52mm by using mounting templates.

Step 2

- > Align the rear notch of charger into the wall-mounted bracket.
- > Use 4 sets expansion screw and M6 screw to fix the wall-mounted bracket on the wall.



Step 3

- > Fix two M5 screws to complete the installation

