



# Gateway International 360, LLC

GATEWAY 360, BORN FOR GREEN ENERGY SOLUTIONS

✉ [tstevens@gatewayintl360.com](mailto:tstevens@gatewayintl360.com)

🌐 [www.gatewayintl360.com](http://www.gatewayintl360.com)

📍 P. O. Box 518, Bear, DE 19701



# GW-EV350

Level 2

ISO/IEC 15118



2 years  
limited  
warranty

## DESIGNED TO FIT INTO YOUR DAILY LIFE



### POWERFUL

Up to 80A / 19.2kW of charging capacity.



### SAFER

SAE J1772 compliant, type 1 plug with 18ft cable.



### CONVENIENT

Adjust power as needed, 48A-16A.



### CONNECTED

Complete with LAN connectivity (Wi-Fi or 4G optional), ensuring chargers are always online.



### OCPP

OCPP 1.6J help you connect EV charger to the cloud.



### DURABILITY

IP65 and IK08 protection ratings, allowing for indoors or outdoors.



Black

Silver



# DATASHEET

Model No.	GW-EV350-3.8	GW-EV350-7.6	GW-EV350-9.6	GW-EV350-11.5	GW-EV350-16.8	GW-EV350-19.2
Input Voltage						
Frequency	50-60Hz					
Amperage	16A	32A	40A	48A	70A	80A
Max. Power Output	3.8kW	7.6kW	9.6kW	11.5kW	16.8kW	19.2kW
Net Weight	12.4lbs	12.4lbs	15.0lbs	16.0lbs	17.7lbs	17.7lbs
Gross Weight	14.8lbs	14.8lbs	17.2lbs	18.5lbs	20.2lbs	20.2lbs
Product Dimensions	14.2"x9.8"x4.4"					
Package Dimensions	19.6"x13.7"x9.9"			19.6"x13.7"x10.5"		


## Protection & Standard

Charging Interface	SAE J1772 Compliant, Type 1Plug
Safety Compliance	UL2594, UL2231-1/-2
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection

## Environmental

Operating Temp.	-22°F to 122°F
Relative Humidity	Up to 95% non-condensing
Cable Length	18ft Standard (25ft Optional with Surcharge)

# OCPP 1.6J, CONNECTED SUCCESSFULLY WITH GATEWAY/ZEVTRON EVC PLATFORMS

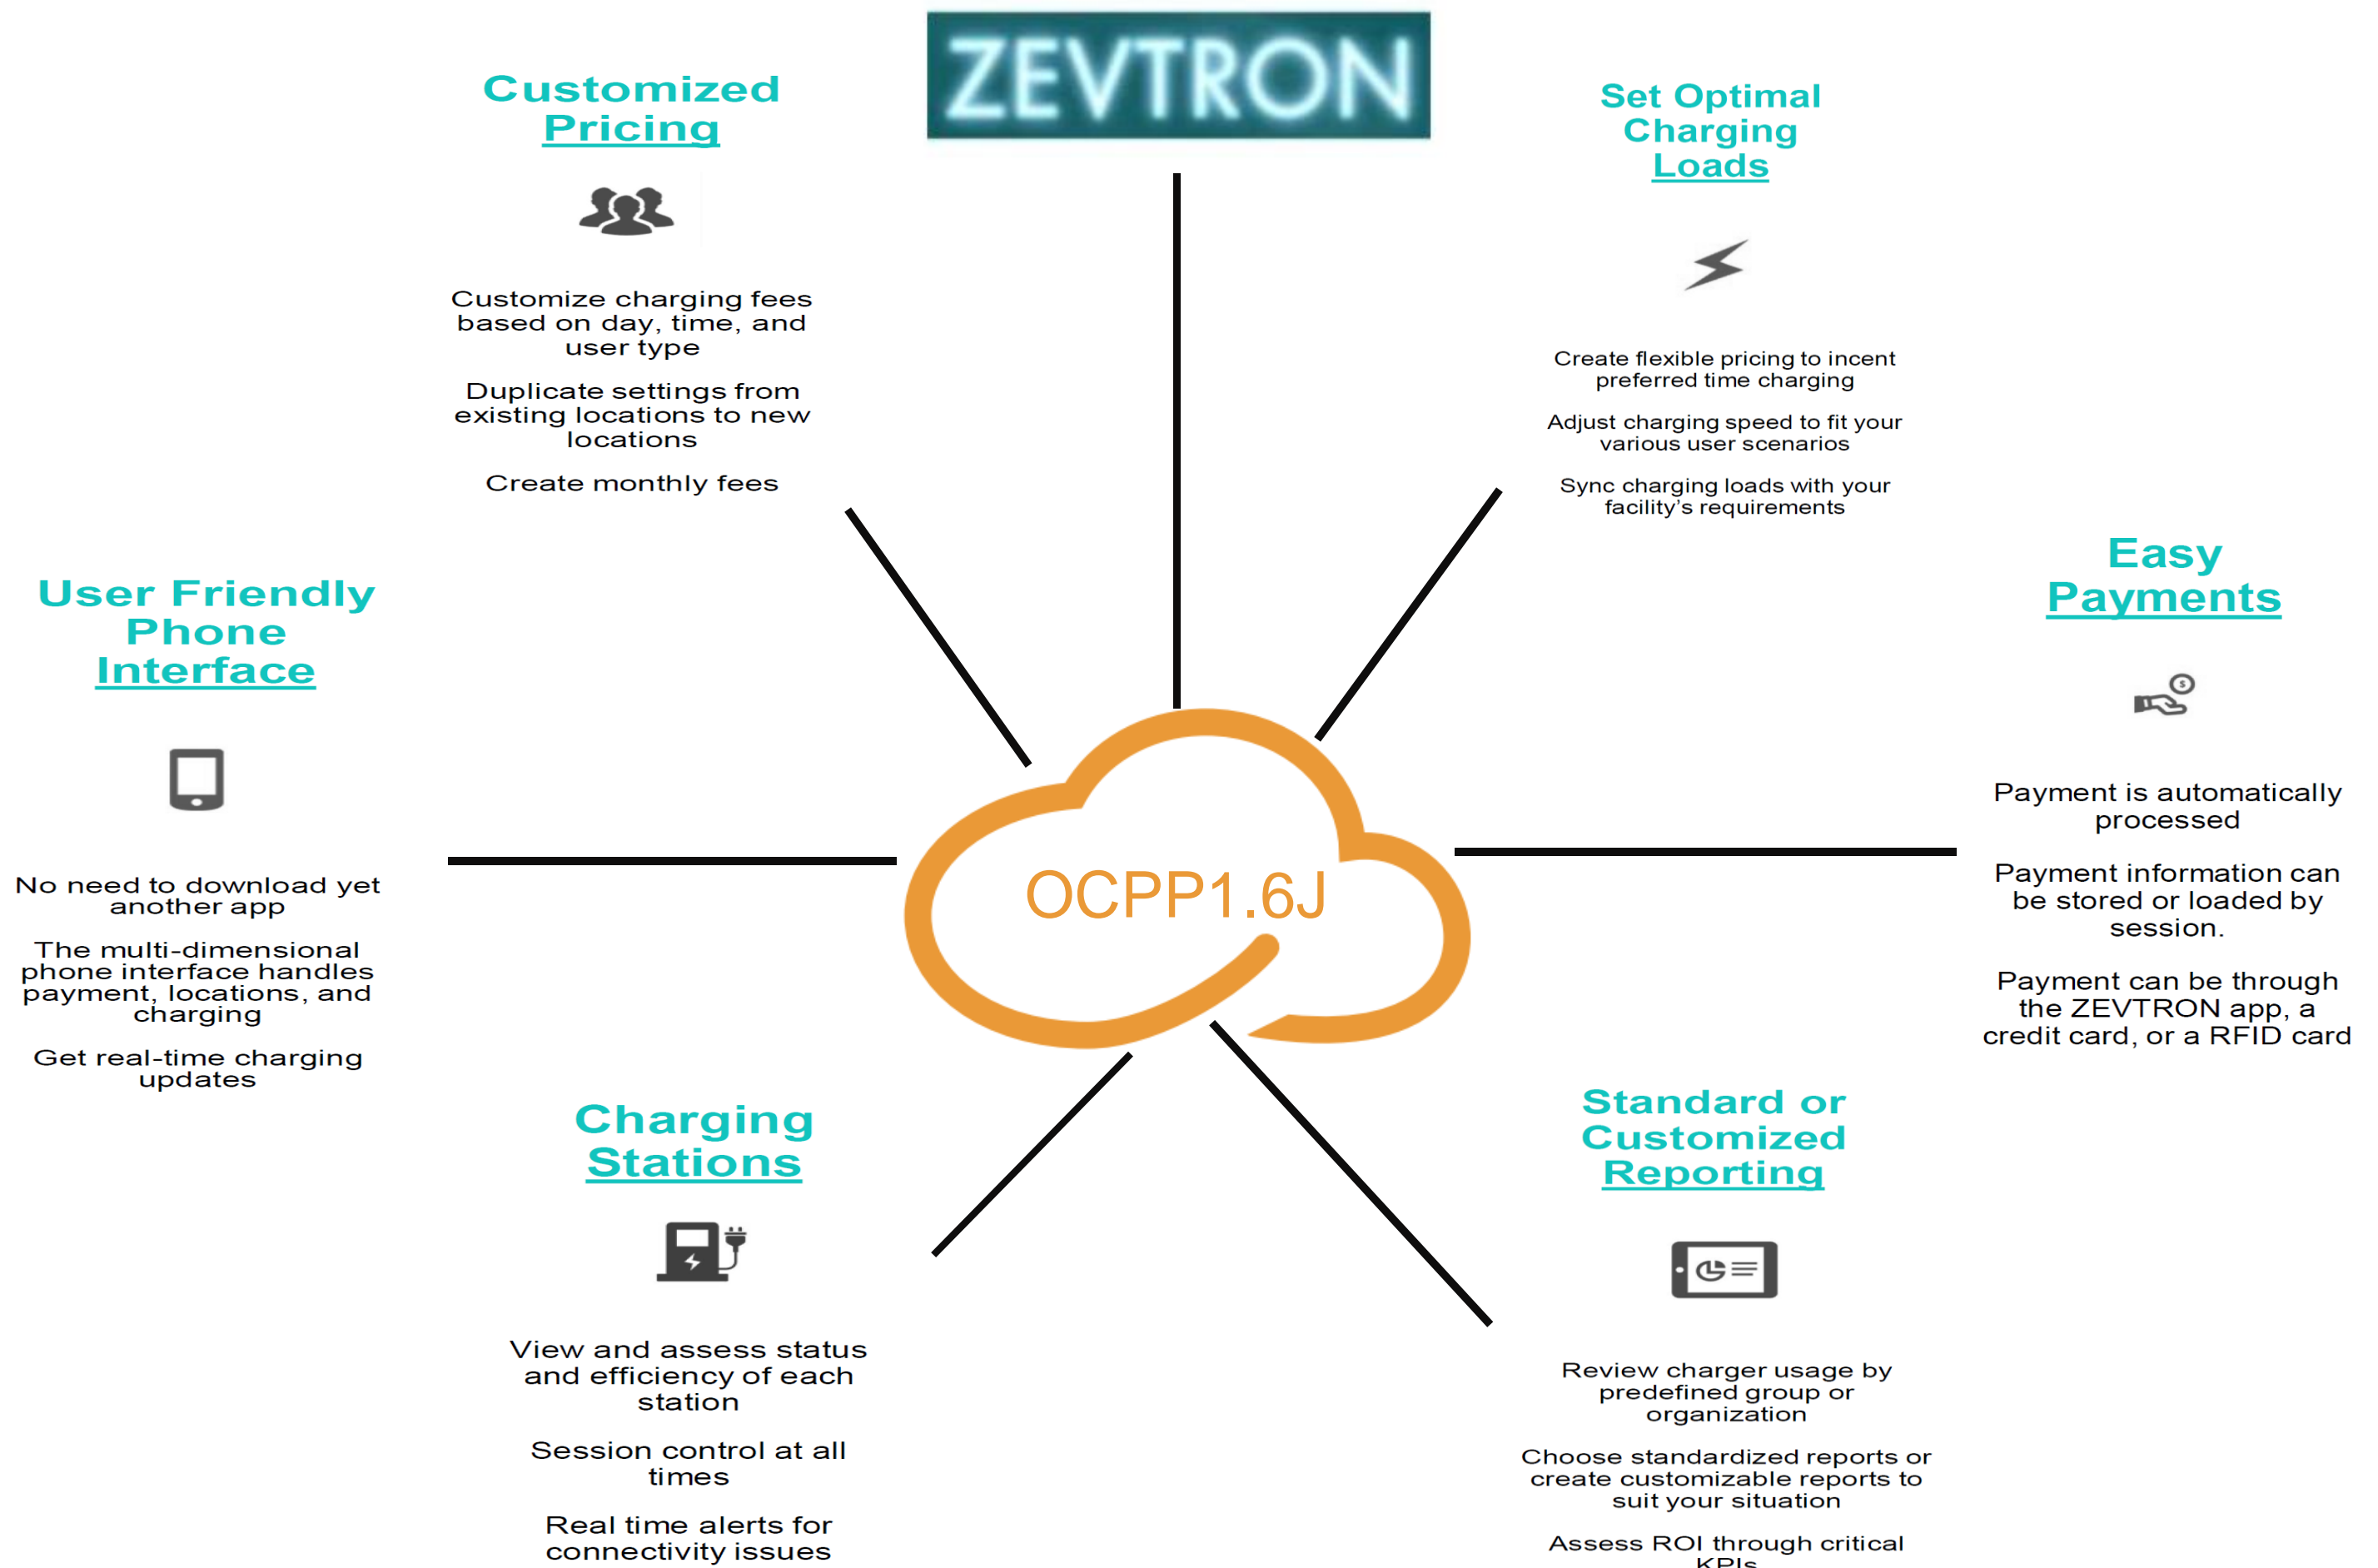



# HOME APP

## Manage your charging activity

- Connect via Wifi or Bluetooth
- Remote start or stop charging
- Schedule your charging time
- Adjust the output from 16A to 48A
- Dynamic load balance setting
- View charging history and power consumption
- Restart button





# EASY INSTALLATION



## Step 1

- > Drill 4 Screw Holes with a diameter of 8mm and a depth of 52mm by using mounting templates.

## Step 2

- > Align the rear notch of charger into the wall-mounted bracket.
- > Use 4 sets expansion screw and M6 screw to fix the wall-mounted bracket on the wall.



## Step 3

- > Fix two M5 screws to complete the installation

