



Gateway International 360, LLC

GATEWAY 360, BORN FOR GREEN ENERGY SOLUTIONS

✉ tstevens@gatewayintl360.com

🌐 www.gatewayintl360.com

📍 P. O. Box 518, Bear, DE 19701

GW-EV400

Level 2

Up to 80A



3
warranty

READY TO HANDLE THE MOST POWERFUL EV BATTERIES



POWERFUL

Up to 80 A / 19.2k W of
charging capacity.



COMPATIBLE

SAE J1772 compliant,
type 1 plug with 18ft
cable.



CONVENIENT

Adjust power as
needed, 80 A-48A,
48A-16A.



CONNECTED

Complete with LAN connec-
tivity (Wi-Fi or 4G optional),
ensuring chargers are
always online.



OCPP

OCPP 1.6J help you
connect EV charger
to the cloud.



DURABILITY

IP65 and IK 08 protection
ratings, allowing for
indoors or outdoors.



Black



Silver

DATA SHEET

Model No.	GW-EV400-1-3.8	GW-EV400-1-7.6	GW-EV400-1-9.6	GW-EV400-1-11.5	GW-EV400-1-16.8	GW-EV400-1-19.2
Input Voltage						
Frequency	60Hz					
Amperage	16A	32A	40A	48A	70A	80A
Max. Power Output	3.8kW	7.6kW	9.6kW	11.5kW	16.8kW	19.2kW
Net Weight	13.8lbs	13.8lbs	16.8lbs	18.1lbs	19.8lbs	19.8lbs
Gross Weight	16.1lbs	16.1lbs	19.0lbs	20.3lbs	22.5lbs	22.5lbs
Package Dimensions	13.8"x 9.8"x 5.1"				13.8"x 9.8"x 5.1"	
Product Dimensions	19.6"x 13.7"x 10.7"				19.6"x 13.7"x 12.4"	


Protection & Standard

Charging Interface	SAE J1772 Compliant, Type 1 Plug
Safety Compliance	UL2594, UL2231-1 and UL2232 -2
Multiple Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection

Environmental

Operating Temp.	-22°F to 122°F
Relative Humidity	Up to 95% non-condensing
Cable Length	18f t Standard (25ft Optional with Surcharge)

OCPP 1.6J, CONNECTED SUCCESSFULLY WITH GATEWAY/ZEVTRON EVC PLATFORMS

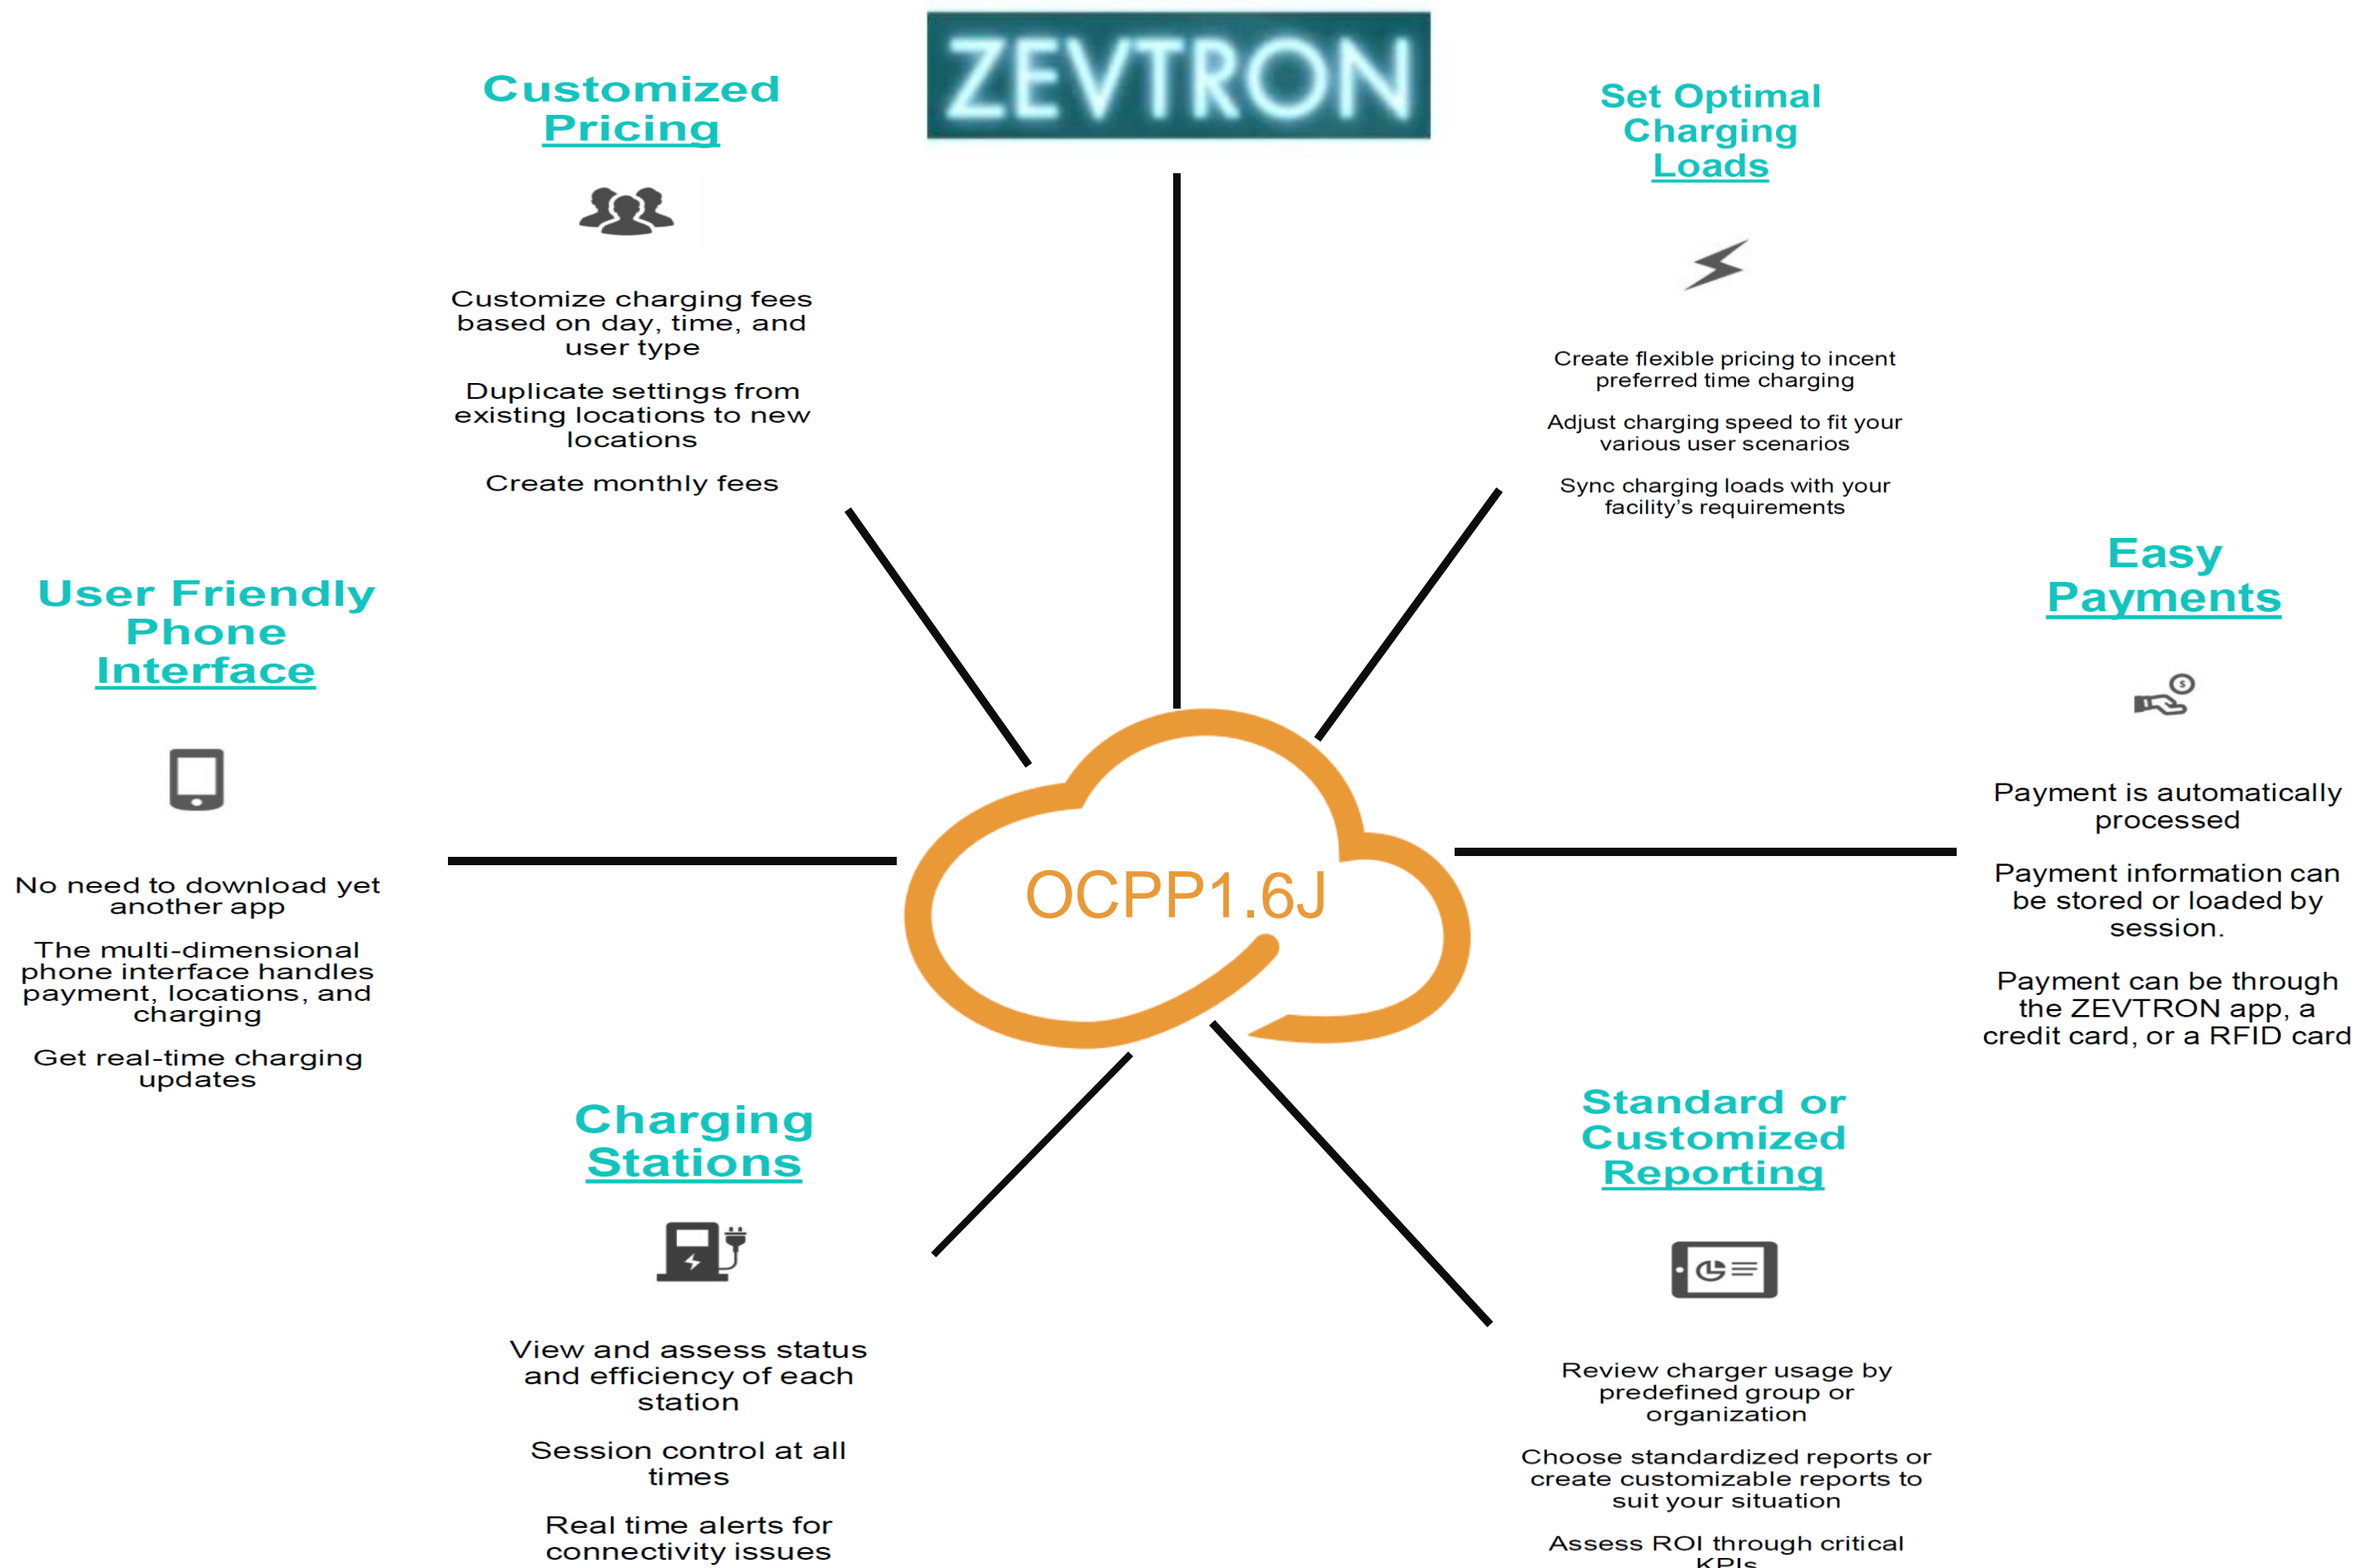

HOME APP

Manage your charging activity

- Connect via Wifi or Bluetooth
- Remote start or stop charging
- Schedule your charging time
- Adjust the output from 16A to 48A
- Dynamic load balance setting
- View charging history and power consumption
- Restart button



EASY INSTALLATION



Step 1

- > Drill 4 Screw Holes with a diameter of 8 mm and a depth of 52mm by using mounting templates.

Step 2

- > Align the rear notch of charger into the wall-mounted bracket.
- > Use 4 sets expansion screw and M6 screw to fix the wall-mounted bracket on the wall.



Step 3

- > Fix two M5 screws to complete the installation

